B/0	客戶確認.建檔	2005/04/11

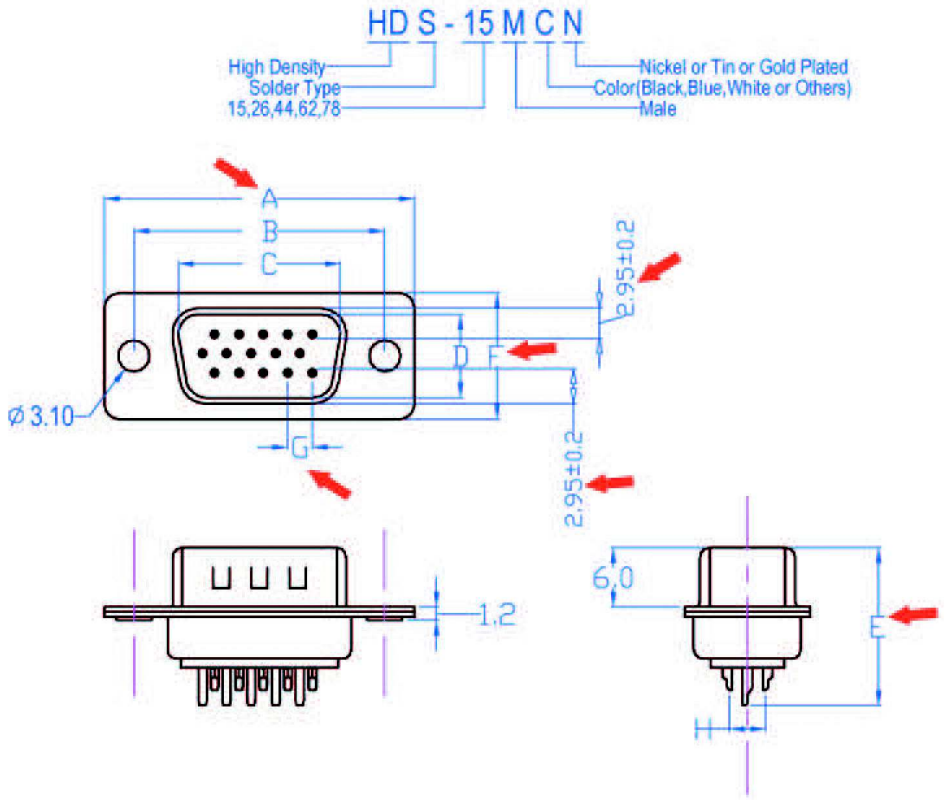

ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING:1AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE:AC 500V R.M.S
INSULATION RESISTANCE:500 MEGOHMS MINIMUM
AT DC 500V.
CONTACT RESISTANCE:30 MILLIOHMS MAXIMUM.
OPERATING TEMPERATURE:-40℃ TO +70℃.

MATERIALS:
CONTACTS:BRASS.
INSULATOR:P.B.T.UL 94V-0 RATED.
SHELL:COLD ROLLED STEEL.

FINISHES:
CONTACTS:GOLD FLASH .
SHELL: NICKELPLATED OR TIN PLATED
OR ZINC PLATED OR GOLD PLATED OR OTHERS.
PLASTIC: BLUE OR BLACK OR WHITE OR OTHERS.

POSITION	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2	G±0.2	H±0.1
HDS-15Pin	30.85	25.00	16.92	8.30	16.70	12.55	2.29	3.96
HDS-26Pin	39.25	33.35	25.25	8.30	16.70	12.55	2.29	3.96
HDS-44Pin	53.10	47.04	38.96	8.30	16.70	12.55	2.29	3.96
HDS-62Pin	69.40	63.50	55.42	8.30	16.70	12.55	2.41	3.96
HDS-78Pin	67.08	61.11	52.81	11.30	16.70	15.30	2.41	3.96

	成品	零件料號			
	料 號	前殼	后殼	膠芯	端子
	CHHDS15M01A	Nickel plated	Tin plated	Black	Gold flash
	CHHDS15M01B	Nickel plated	Tin plated	Blue	Gold flash
✓	CHHDS15M01C	Nickel plated	Tin plated	White	Gold flash
	CHHDS15M01D	Nickel plated	Tin plated	Black	Gold plated 30u"
	CHHDS15M01E	Nickel plated	Tin plated	Blue	Gold plated 30u"
	CHHDS15M01F	Nickel plated	Tin plated	White	Gold plated 30u"
	CHHDS15M01G	Nickel plated	Tin plated	Black	Gold plated 15u"
	CHHDS15M01H	Gold plated	Gold plated	Black	Gold plated 15u"
	CHHDS15M01I	Gold plated 2u"	Tin plated	Black	Gold plated 30u"
	CHHDS15M01J	Tin plated	Tin plated	Black	Gold flash
	CHHDS15M01K	Tin plated	Tin plated	White	Gold plated
	CHHDS15M01L	Gold plated	Tin plated	Black	Gold flash
	CHHDS15M01M	Nickel plated	Tin plated	Black	Gold plated 6u"

Tolerances
Otherwise Stated
X. ±0.3
X.X ±0.2
X.XX ±0.1
X.XXX ±0.05
ANGULAR±2°

MATERIAL
KSDSMS03
KSDSS01
TDHDMC03
TDHDMC04
JZHDS15MP01
JZHDS15MP02

CUSTOMER P/N:

CH P/N.:

TITLE: HD 15Pin Male Connector

APP: 黃冠偉 CHK: 方少君 DRW: Z.X.Y

UNIT: mm SCALE: REV: B/0 DATE:2005/04/11